



LOC	DIST	P	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14				REVISED & REDRAWN PER 0720-0303-93	7-28-93	BB

REV	DATE	DESCRIPTION
1		

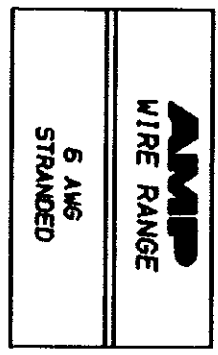

METRIOR
 DIMENSIONS LISTED IN MM [INCHES]

NOTE:
 1. WIRE INSULATION DIA 7.87 [.310] MAX

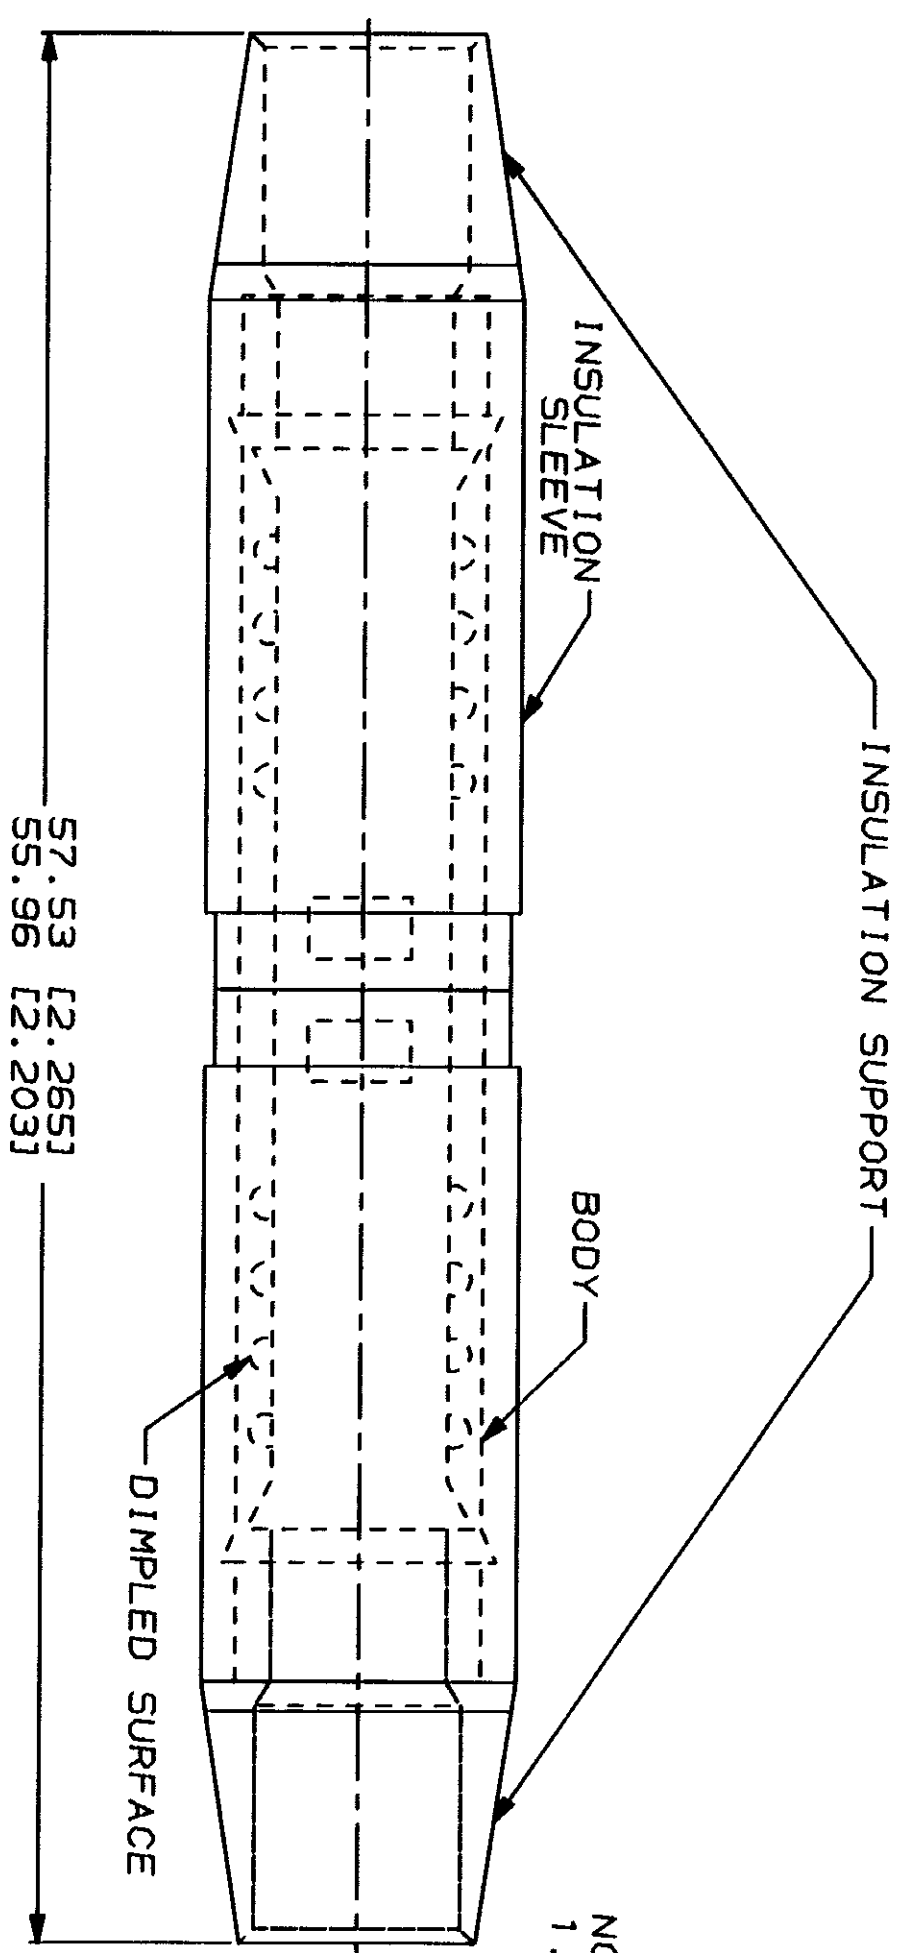

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C		DO NOT SCALE PRINT. DIMENSIONS SPECIFIED		DR S.S. GOULDEN		QTY 100		LOOSE PC		324660	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS 1-800-522-6752		PRODUCT INFORMATION CENTER		TOLERANCES UNLESS SPECIFIED: 2 PLG DEC ± 0.201.0002 3 PLG DEC ± . . .		CHK R. HEBERT		GTY		PACKAGE TYPE		PART NO	
FOR APPLICATION TOOLS ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 10.54-16.77mm² [20, 800-33, 100]		MATERIAL COPPER PER ASTM B-152 ANNO, COLOR, BLUE		APPD B. BAILE		NAME		AMP		AMP Incorporated	
FOR ORDER ENTRY 1-800-526-5142		STRANDED		FINISH TIN PLATE PER MIL-T-10727		APPD M. ELLIS		SPLICE, BUTT, SINGLE TO SINGLE, TERMINAL, WIRE SIZE: 6 AWG		SIZE		CAGE CODE	
						PRODUCT SPEC				00779		DRAWING NO	
						APPLICATION SPEC				SCALE		324660	
						WEIGHT				NTS		SHEET	
												1 OF 1	