
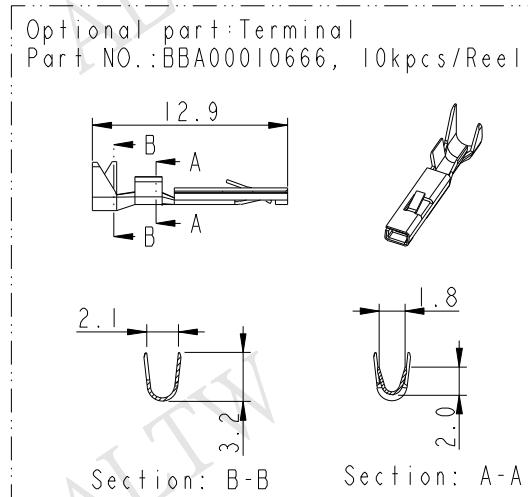
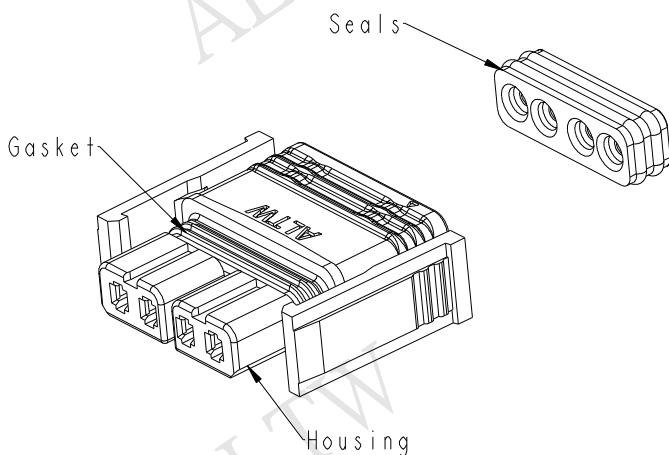

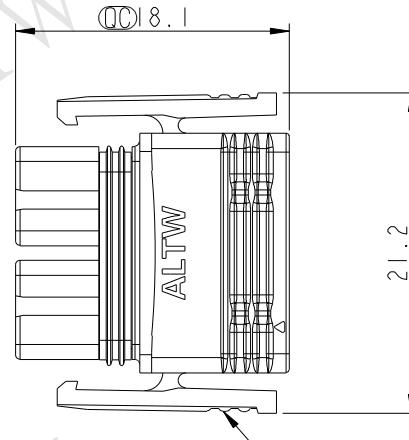
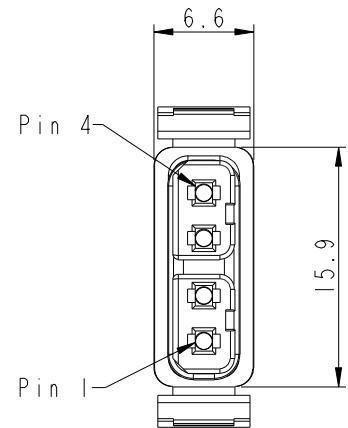


1	2	3	4	5	6	7	8
F	E	D	C	B	A		
				REV.	ECN NO.	DATE	SIGN
				A	Initial Release	2015-04-15	Fisher
				B	LEN1620286	2016-03-04	Fisher
							DESCRIPTION
							Initial Release
							Update Label



- Notes:
- \* **Important Dimension To Check.**
  - \* Waterpoof Rate: IP68(mating).
  - \* IM Depth Of Water In 24 Hours.
  - \* Housing: Thermoplastic, UL94V-0, Natural White.
  - \* Gasket: Silicone, Gray.
  - \* Seals: Silicone, Gray
  - \* Current Rating: 5A maximum.
  - \* Applicable Wire Range: UL1430, 20~22AWG
  - \* Voltage Rating: 250V AC/DC maximum.
  - \* Operating Temperature: -40~+105°C
  - \* Applicable terminal : BBA00010666

UNIT:mm			TITLE SSL1.2 4P M Conn, Field Installable	
TOLERANCE	±0.5mm		SCALE 2:1	SIZE A4 SHEET 1 OF 2
			REV. B	WC-REV. A.4 QC: Inspection item

**Amphenol LTW**  
**安費諾亮泰企業股份有限公司**

ITEM NO SSL12-P4FP0-M00001	DRAWN BY Fisher_Wang	DATE 2016-03-04
DWG NO SSL12-P4FP0-M00001	CHECKED BY Victor_Hung	DATE 2016-03-04
CUSTOMER ALTW	APPROVED BY Kevin_Hu	DATE 2016-03-04

