


**NOTES:**

- 1.0 ELECTRICAL SPECIFICATIONS
  - 1.1 FREQUENCY RANGE: DC to 4.0 GHz.
  - 1.2 MAX. INPUT POWER:
    - 2 WATTS AVERAGE AT +25°C DERATED LINEARLY TO 0.5 WATTS AT +125°C.
  - 1.3 OPERATING TEMP. RANGE: -54°C to +125°C.
  - 1.4 IMPEDANCE: 50 OHMS.
  - 1.5 VSWR (MAX.): 1.20:1
  - 1.6 PEAK POWER:
    - 0.25 KILOWATT (5 MICROSECOND PULSE WIDTH).
- 2.0 MARKING
  - 2.1 MARK UNIT AS SHOWN: (REF: INK-02638-27-02)
- 3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

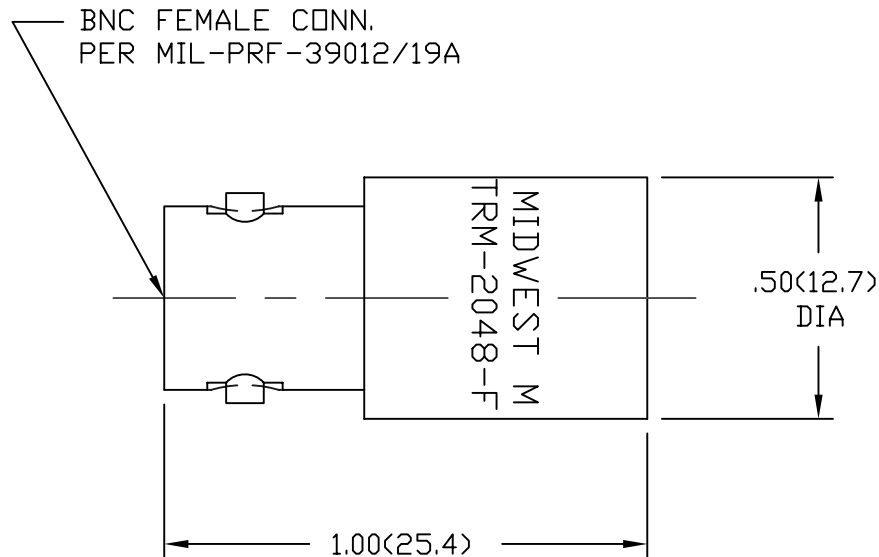

MODEL NUMBER  
TRM-2048-F0-BNC-10

DWG. NO. WAS: 05997-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	2/20/93
A	ECR 6545	8/1/89
B	ECN 12414	2/9/93
B1	ADDED TITLEBLOCK	10/28/05

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.  UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	CASE CODE <b>34078</b>	<b>MIDWEST MICROWAVE</b>	
		TITLE TERMINATION BNC FEMALE OUTLINE DRAWING	
DRAWN/DATE M.HOLLMAN 2/9/93	ENG./DATE G.KOZAK 2/19/93	DRAWING NUMBER TRM-2048-F0-BNC-10-01	REV. B1
CHECKED/DATE A.BEATTY 2/17/93	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1